

The right temperature worldwide

# LAUDA



## Chapter PRO

**LAUDA – the big one**

Thermostats, Circulation chillers, Water baths

Overall Brochure 2016/2017

# NEW LAUDA PRO

Bath and circulation thermostats for professional temperature control from -100 up to 250 °C



## Application examples


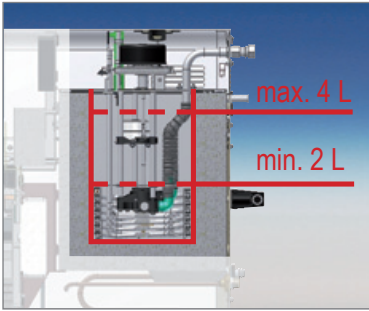
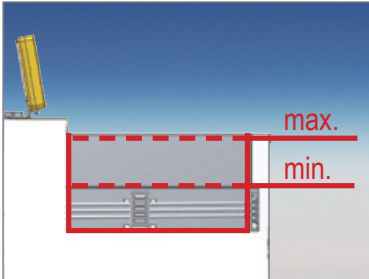

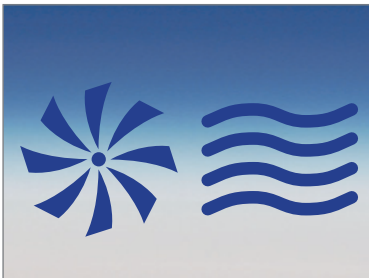
- Functional testing of electronic components
- Material testing of metal and plastic samples
- Sensor calibration
- Thermal control of chemical and biological reactions
- Precise temperature control for crystallization processes
- Temperature control of measuring and test rigs, heat exchangers and distillation apparatus

## Flexible operation, outstanding performance data

The **LAUDA PRO** offers the user a future-proof product line having an outstanding overall concept. A significant innovation in the concept is the subdivision into thermostats for internal applications and thermostats for external applications. Heating and cooling bath thermostats have been optimized for internal applications. Circulation thermostats for external applications are a new category. Small active volumes enable rapid temperature changes. A new approach was also taken with the operating concept. There are two operating units available, Base and Com-

mand Touch. These can be removed from the thermostat for very high levels of flexibility. On the one hand, this permits remote control of the devices, and, other hand, this considerably reduces the height of the devices. All thermostats are equipped with an Ethernet and a USB interface as well as a Pt100 connection as standard. The cooling thermostats are also available with natural refrigerants. In addition, they are also equipped with a hybrid cooling system as standard. This enables additional cooling of the refrigerating machine with water.

# Your advantages at a glance

+	The PRO advantages	Your benefits
	<ul style="list-style-type: none"> <li>Operating unit rotates 360° and can be removed</li> </ul>	<ul style="list-style-type: none"> <li>360° access to the bath</li> <li>Spatial separation of operating unit and bath</li> <li>Low equipment height</li> <li>Remote control unit</li> </ul>
	<ul style="list-style-type: none"> <li>Low filling volume combined with a powerful Varioflex pump</li> </ul>	<ul style="list-style-type: none"> <li>Rapid temperature change</li> <li>Low operating costs and material deployment</li> </ul>
	<ul style="list-style-type: none"> <li>Low minimum filling height</li> <li>Optimized bath circulation</li> </ul>	<ul style="list-style-type: none"> <li>Full bath functionality</li> <li>A wide level range allows the use of variable probes</li> <li>Very high temperature stability and homogeneity</li> </ul>
	<ul style="list-style-type: none"> <li>USB, Ethernet and Pt100 interface equipped as standard while other interface modules are available</li> </ul>	<ul style="list-style-type: none"> <li>Robust control system via local network</li> <li>Flexible actuation possibilities</li> </ul>
	<ul style="list-style-type: none"> <li>Hybrid cooling for the refrigeration circuit allows for cooling with both ambient air and supplementary cooling water</li> <li>All devices are available with natural refrigerants</li> </ul>	<ul style="list-style-type: none"> <li>Reduction of waste heat to the ambient, flexible deployment to suit environmental conditions</li> <li>Environment-friendly, low global warming potential (GWP)</li> </ul>

# LAUDA PRO

## Flexible operation

The user can choose between two operating units, Base or Command Touch, for the PRO product line. The remote control units are removable. The Base operating unit with OLED display is suitable for universal operating requirements for day-to-day use. The Command Touch operating unit with multi-touch display offers very high operating convenience on a future-proof software platform. Parallel connection of Base and Command Touch is possible.

Remote control unit Base



Remote control unit Command Touch




### Remote control unit Base

- Bright high contrast OLED display
- Convenient operation using softkeys and cursor
- Clear menu navigation
- Programmer with 1 program, 20 segments
- Removable
- Temperature display in °C or °F
- Cable extension possible up to 50 meters
- Menu navigation in 5 languages




### Remote control unit Command Touch


- Large color touch screen (5.7")
- Multi-touch operation using freely-configurable tiles – can be operated wearing gloves
- Zoomable graphic view
- Programmer with 100 programs, each with 50 segments
- Weekly timer and count-down function
- Ramp function
- Data logging, export to USB stick
- Individual user rights for up to 20 users
- Removable
- Temperature display in °C or °F
- Cable extension possible up to 50 meters
- Menu navigation in 8 languages

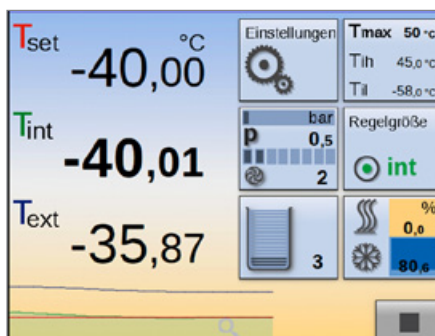

Freely-configurable tile sequences

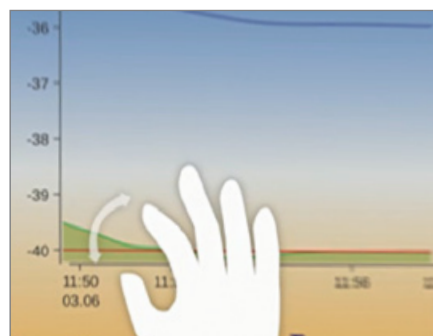

Zoomable graphic view

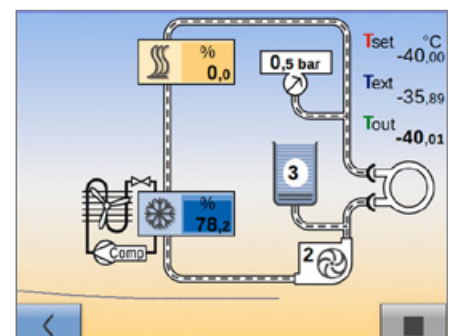

Hydraulic circuit diagram with direct operating facility

# PRO Heating bath thermostats


The PRO heating bath thermostats P 10, P 20 and P 30 work up to a maximum temperature of 250 °C. The thermostats, having volumes of 10, 20 and 30 liters, are optimized for internal bath applications and offer excellent temperature stability. The removable operating unit, including mount, allows considerable reduction in the height of device.



Heating bath thermostat P 10 with control unit Base. Also available with control unit Command Touch.



## Heating curves Heat transfer liquid: Ultra 300, bath closed

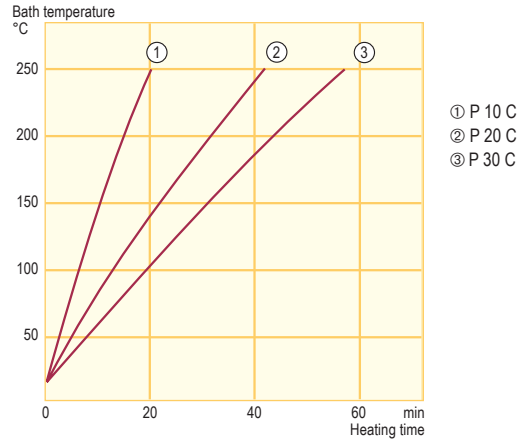

Temperature range  
30...250 °C

Included as standard  
USB, Ethernet interface, Pt100 connection socket

Accessories included  
Bath cover · 2 hose olives with cap nuts for the cooling coil



All technical data on page 98 and following  
Other power supply variants on page 110

Technical features		P 10	P 20	P 30
Working temperature range*	°C	40...250	35...250	30...250
Temperature stability	±K	0.01	0.01	0.01
Heater power	kW	3.6	3.6	3.6
Bath volume	L	5.5...10	11...20	15.5...28.5
Bath opening/Bath dept	mm	240x150/200	300x290/200	340x385/200
Cat. No. 230 V; 50/60 Hz	Base	L000001	L000002	L000003
Cat. No. 230 V; 50/60 Hz	Command Touch	L000004	L000005	L000006

\*Working temperature range with water cooling 20 ... 250 °C

## PRO Cooling bath thermostats


The PRO cooling bath thermostats for internal bath applications offer a working temperature range from -100 up to 200 °C. A multi-stage adjustable pump ensures good mixing of the bath. With their bath sizes from 10 to 30 liters and cooling outputs from 0.4 to 1.5 kW, the cooling thermostats are suitable for a wide range of applications. Hybrid cooling of the refrigerating machine permits cooling using ambient air and, supplementary cooling water. Standard bath edge heating on all devices prevents the formation of ice on the surface of the bath cover.



Cooling bath thermostat RP 2040 C with control unit Command Touch. Also available with control unit Base.



### Cooling curves Heat transfer liquid: Ethanol, bath closed

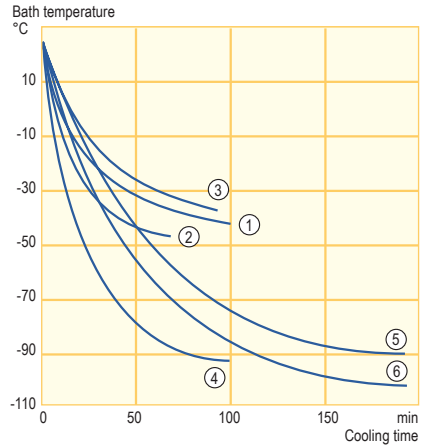

- ① RP 2040 C
- ② RP 2045 C
- ③ RP 3035 C
- ④ RP 1090 C
- ⑤ RP 2090 C
- ⑥ RP 10100 C

#### Temperature range

-100...200 °C

#### Included as standard

USB, Ethernet interface, Pt100 connection socket

#### Accessories included

Bath cover · 2 hose olives with cap nuts for water cooling



All technical data on page 102 and following  
Other power supply variants on page 112

Technical features		RP 2040	RP 2045	RP 3035	RP 1090	RP 2090	RP 10100
Working temperature range*	°C	-40...200	-45...200	-35...200	-90...200	-90...200	-100...200
Temperature stability	±K	0.01	0.01	0.01	0.01	0.01	0.01
Heater power	kW	3.6	3.6	3.6	3.6	3.6	3.6
Cooling output at 20 °C	kW	0.8	1.5	0.8	0.8	0.8	0.4
Bath volume	L	12.5...21	12.5...21	17.5...29.5	6.5...11	12.5...21	6.5...11
Bath opening/depth	mm	300x290/200	300x290/200	340x375/200	240x150/200	300x290/200	240x150/200
Cat. No. 230 V; 50 Hz	Base	L000007	L000008	L000009	L000010	L000011	L000012
Cat. No. 230 V; 50 Hz	Command Touch	L000013	L000014	L000015	L000016	L000017	L000018

\* Working temperature range is equal to ACC range

# PRO Heating circulation thermostats


The PRO heating circulation thermostats are designed for external applications up to 250 °C. The low filling volume permits rapid heating in the external applications. The compact construction permits space-saving installation of the thermostats. An integrated cooling coil, fitted as standard, provides cooling.



Heating circulation thermostat P 2 E with control unit Base.  
Also available with control unit Command Touch.



## Pump characteristics Heat transfer liquid: Water

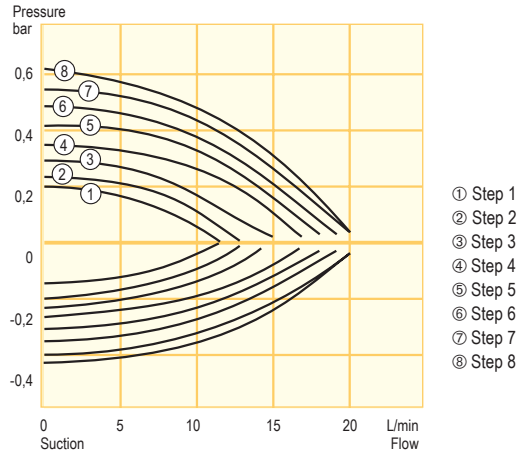

Temperature range  
80...250 °C

Included as standard  
USB, Ethernet interface, Pt100 connection socket

Accessories included  
2 hose olives 13 mm for pump connection · 2 hose olives 10 mm with cap nut G<sup>3</sup>/<sub>8</sub> for cooling water connection



All technical data on page 98 and following  
Other power supply variants on page 110

Technical features		P 2 E
Working temperature range*	°C	80...250
Temperature stability	±K	0.05
Heater power	kW	2.5
Pump pressure max.	bar	0.7
Pump suction max.	bar	0.4
Pump flow (pressure) max.	L/min	22
Pump flow (suction) max.	L/min	20
Filling volume	L	2.4...4.4
Cat. No. 230 V; 50/60 Hz	Base	L000019
Cat. No. 230 V; 50/60 Hz	Command Touch	L000020

\*Working temperature range with water cooling 20 ... 250 °C

# LAUDA PRO

## PRO Cooling circulation thermostats


The PRO cooling circulation thermostats are ideal for external applications where rapid temperature changes are required. The cooling output of 0.6 and 0.8 kW, combined with a very small filling volume permit these rapid temperature changes. The thermostats have a working temperature range of -45 up to 200 °C. All devices are fitted with a pressure-suction pump. Hybrid cooling of the refrigerating machine permits cooling using ambient air and, supplementary cooling water.



Cooling circulation thermostat RP 240 EC with control unit Command Touch. Also available with control unit Base.




### Pump characteristics Heat transfer liquid: Water

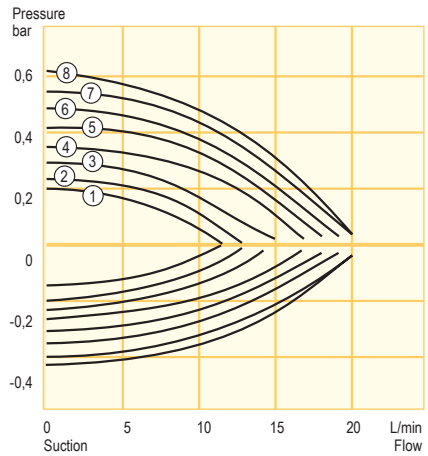

- ① Step 1
- ② Step 2
- ③ Step 3
- ④ Step 4
- ⑤ Step 5
- ⑥ Step 6
- ⑦ Step 7
- ⑧ Step 8

### Cooling output Heat transfer liquid: Ethanol

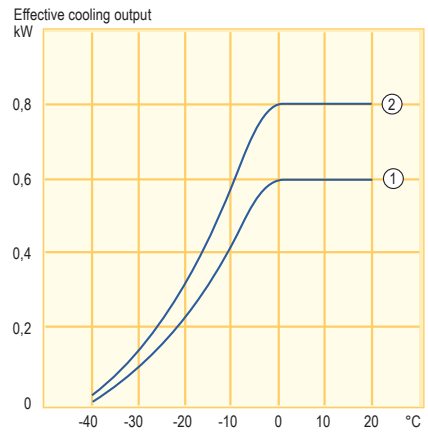

- ① PR 240 E(C)
- ② PR 245 E(C)

### Temperature range

-45...200 °C

### Included as standard

USB, Ethernet interface, Pt100 connection socket

### Accessories included

2 hose olives 13 mm for pump connection · 2 hose olives 10 mm with cap nut G<sup>3</sup>/<sub>8</sub> for cooling water connection



All technical data on page 102 and following  
Other power supply variants on page 112

Technical features		RP 240 E	RP 245 E
Working temperature range*	°C	-40...200	-45...200
Temperature stability	±K	0.05	0.05
Heater power	kW	2.5	2.5
Cooling output at 20 °C	kW	0.6	0.8
Pump pressure max.	bar	0.7	0.7
Pump suction max.	bar	0.4	0.4
Pump flow (pressure) max.	L/min	22	22
Pump flow (suction) max.	L/min	20	20
Filling volume	L	2.4...4.4	2.4...4.4
Cat. No. 230 V; 50/60 Hz	Base	L000021	L000022
Cat. No. 230 V; 50/60 Hz	Command Touch	L000023	L000024

\* Working temperature range is equal to ACC range



## PRO accessories (excerpt)

### Interface modules

Cat. No.	Description
LRZ 912	Analog module
LRZ 913	RS 232/485 interface
LRZ 914	Contact module NAMUR, 1 x In, 1 x Out
LRZ 915	Contact module, 3 x In, 3 x Out
LRZ 917	Profibus module
LRZ 922	EtherCAT module with M8 connection
LRZ 923	EtherCAT module with RJ45 connection
LCZ 9727	Module box with LiBus for 2 modules



LRZ 912 LRZ 913 LRZ 914 LRZ 915 LRZ 917



LRZ 922



LRZ 923



LCZ 9727

### Polymer tubing

Cat. No.	Designation	d <sub>i</sub> (mm)	d <sub>e</sub> (mm)	Temp.-Range °C
RKJ 059	Silicone tube	11	15	10...100
RKJ 111	EPDM tube	9	11	10...120
RKJ 112	EPDM tube	12	14	10...120
LZS 021	EPDM tube insulated	12	35	-35...90
LZS 007	Silicone tube insulated	12	33	-60...100

d<sub>i</sub> = internal diameter ; d<sub>e</sub> = external diameter



LZS 007

### Metal hoses with cold insulation

For connections with thread M16 x 1

Cat. No.	Designation	Length/cm	d <sub>i</sub> (mm)	d <sub>e</sub> (mm)	Temp.-Range °C
LZM 052	MK 50	50	10	44	-90...150
LZM 053	MK 100	100	10	44	-90...150
LZM 054	MK 150	150	10	44	-90...150
LZM 055	MK 200	200	10	44	-90...150
LZM 046	MC 50 S	50	10	34	-60...350
LZM 049	MC 200 S	200	10	34	-60...350
LZM 098	MC 300 S	300	10	34	-60...350
LZM 045	Pump link	18	10	44	-90...150

d<sub>i</sub> = internal diameter ; d<sub>e</sub> = external diameter



LZM 052/LZM 053/LZM 054/LZM 055



Order the detailed LAUDA accessories brochure and the heat transfer liquids brochure free of charge. These and additional product information can also be found at [www.lauda.de](http://www.lauda.de)

## Temperature solutions:

Thermostats · Circulation chillers · Water baths

Process cooling systems · Heat transfer systems · Secondary circuit systems



**LAUDA DR. R. WOBSE  
R GMBH & CO. KG**  
Headquarters  
Pfarrstraße 41/43  
97922 Lauda-Königshofen  
Germany  
Phone: +49 (0)9343 503-0  
E-mail: info@lauda.de



**LAUDA-Noah, LP**  
308 Digital Drive  
Morgan Hill, CA 95037  
USA  
Tel.: +1 360 993 1395  
E-mail: info@lauda-noah.com



**LAUDA Technology Ltd.**  
4200 Waterside  
Solihull Parkway  
Birmingham Business Park  
B37 7YN Birmingham  
Great Britain  
Phone: +44 121 717 4789  
E-mail: info@lauda-technology.co.uk



**LAUDA China Co. Ltd.**  
**Shanghai**  
2nd floor, Building 6  
No. 201 MinYi Road  
SongJiang District  
201612 Shanghai  
China  
Phone: +86 21 64401098  
E-mail: info@lauda.cn



**LAUDA-Brinkmann, LP**  
1819 Underwood Boulevard  
08075 Delran, NJ  
USA  
Phone: +1 856 7647300  
E-mail: info@lauda-brinkmann.com



**LAUDA América Latina  
Tecnología Ltda.**  
Av. Paulista, 726 – 17º andar – Cj. 1707  
01310-910 – São Paulo – SP  
Brazil  
Phone: +55 11 3192-3904  
E-mail: info@lauda.net.br



**LAUDA France S.A.R.L.**  
Parc Technologique de Paris Nord II  
Bâtiment G  
69, rue de la Belle Etoile  
BP 81050 Roissy en France  
95933 Roissy Charles de Gaulle Cedex  
France  
Phone: +33 1 48638009  
E-mail: info@lauda.fr



**Office Beijing**  
15/F, Office Building A,  
Parkview Green,  
9 Dongdaqiao Road,  
Chaoyang District  
100020 Beijing  
China  
Phone: +86 10 57306210  
E-mail: info@lauda.cn



**LAUDA-Brinkmann, LP**  
308 Digital Drive  
Morgan Hill, CA 95037  
USA  
Phone: +1 856 7647300  
E-mail: info@lauda-brinkmann.com



**LAUDA Ultracool S.L.**  
C/ Colom, 606  
08228 Terrassa (Barcelona)  
Spain  
Phone: +34 93 7854866  
E-mail: info@lauda-ultracool.com



**LAUDA Italia S.r.l.**  
Strada 6 – Palazzo A – Scala 13  
20090 Assago Milanofiori (MI)  
Italy  
Phone: +39 02 9079194  
E-mail: info@lauda-italia.it



**LAUDA Singapore Pte. Ltd.**  
25 International Business Park  
#04-103M German Centre  
Singapore 609916  
Phone: +65 6563 0241  
E-mail: info@lauda.sg



**LAUDA-Noah, LP**  
2501 SE Columbia Way, Suite 140  
Vancouver, WA 98661  
USA  
Tel.: +1 360 993 1395  
E-Mail: info@lauda-noah.com



**LAUDA IBÉRICA SOLUCIONES  
TÉCNICAS, S.L.**  
C/ Colom, 606  
08228 Terrassa (Barcelona)  
Spain  
Phone: +34 93 7854866  
E-mail: info@lauda-iberica.es



**OOO „LAUDA Wostok“**  
Malaja Pirogovskaja Str. 5  
119435 Moscow  
Russia  
Phone: +7 495 9376562  
E-mail: info@lauda.ru

**LAUDA DR. R. WOBSE R GMBH & CO. KG**  
Pfarrstraße 41/43 · 97922 Lauda-Königshofen · Germany  
Phone: +49 (0)9343 503-0 · Fax: +49 (0)9343 503-222  
E-mail: info@lauda.de · Internet: www.lauda.de